

Application Note

Megger[®]

Testing wind turbine lightning protection



Contents

How do wind turbines get damaged?.....	4
Testing wind turbine lightning protection.....	4
Testing wind turbine lightning protection.....	6
How does wind turbine lightning protection work.....	6
Testing wind turbine lightning protection.....	7
Testing wind turbine lightning protection.....	7
How to test wind turbine lightning protection?	7
Testing wind turbine lightning protection.....	8
Testing wind turbine lightning protection.....	9
Testing wind turbine lightning protection.....	9
How can Megger help with testing wind turbines?	10
Testing wind turbine lightning protection.....	10

How do wind turbines get damaged?

The most significant danger facing wind turbines is damage from lightning strikes (see figure 1). A German study found that 80% of wind turbine insurance claims paying out for damage compensation were caused by lightning strikes.



Fig 1: *Lightning hitting wind turbines during a storm*

85% of the downtime experienced by one commercial wind farm in the USA was found to be lightning related, costing around \$250,000 in the first year of operation alone. And as another example, a large wind farm in the North Sea, near the German island of Helgoland, suffered such large losses because of lightning strikes that its operation was no longer cost effective.

Lightning faults cause more loss in wind turbine availability and production than the average fault. The number of failures due to lightning strikes is known to increase with tower height and a growing number of studies speculate that rotating wind turbines may be more susceptible to lightning strikes than stationary structures. Given that turbine heights are expected to increase and the renewable energy industry is growing, the number of failures is likely to grow with them.

Testing wind turbine lightning protection

To reduce the likelihood of damage, protection from lightning is now being built into the turbines. It is hoped that this will prevent the damage shown in figures 2, 3 and 4.



Fig 2: *Turbine blade damaged by a lightning strike*



Fig 3: *Entry point at tip of turbine blade from a lightning strike*

Testing wind turbine lightning protection



Fig 4: *Catastrophic failure of a wind turbine due to a lightning strike*

How does wind turbine lightning protection work

The protection takes the form of a low resistance path to ground. The path goes from the blade's tip (figure 5) to the base of the turbine (figure 6). This path is shown in figure 7.



Fig 5: *Blade tip*



Fig 6: *Turbine base*

Testing wind turbine lightning protection

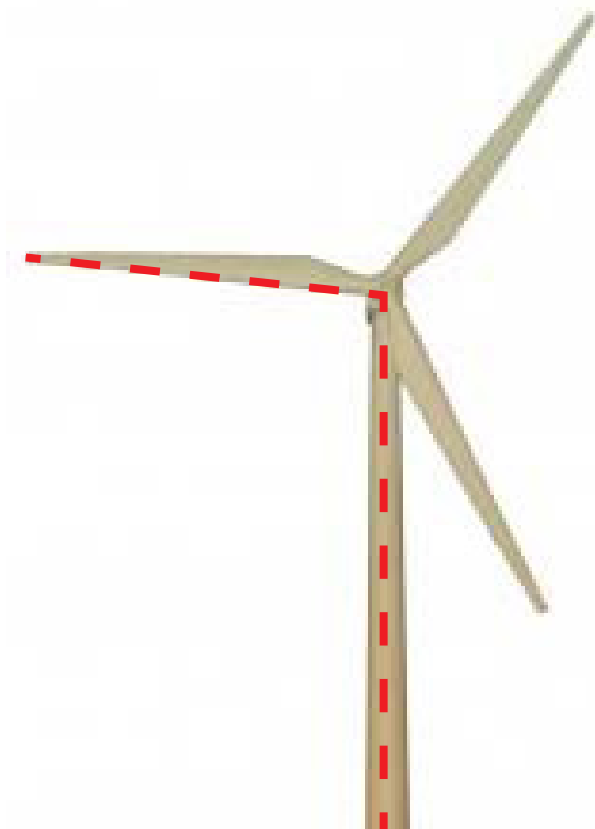


Fig 7: *Low resistance path through turbine (indicated in red)*

In the event of a lightning strike, current will flow to ground through the lightning protection system, not the sensitive equipment in the wind turbine. To ensure the protection will work when needed, the resistance of the path to ground should be measured at regular intervals, making sure it meets

Testing wind turbine lightning protection

The limits specified by the turbine manufacturer (typically limited to 15-30 m Ω , depending on turbine size). For these tests, a low resistance ohmmeter should be used.

How to test wind turbine lightning protection?

The most important part to test is the conductor inside the blade. This measurement is taken between the blade's tip and the blade's root (see figure 8). This conductor is placed under significant strain as the blade flexes with the wind. Under strain, the conductor may fracture.

Unfortunately, it is not enough to simply check continuity, because if the fractured conductor is touching at the break point during a continuity test, it will still pass. A current of 1 Ampere or more is recommended for this test.



Fig 8: *Lightning protection conductor inside wind turbine blade (in red)*

When testing on the production line, the conductor inside the blade is tested on its own. The connection points are shown in figures 9 and 10.

Testing wind turbine lightning protection



Fig 9: *Connection at blade's root*



Fig 10: *Connection at blade's tip*

Testing wind turbine lightning protection

The length of a turbine blade can be seen in figure 11. The size of the turbines pose a problem, because low resistance ohmmeter test leads are typically very short. Due to the size of the wind turbines, some extra-long leads are required, often up to 100 m.



Fig 11: *Turbine blade laid down at ground level*

This is a huge increase in length over standard test leads for low resistance ohmmeters. The long leads need to be designed with a low enough resistance to ensure that a measurement is still possible. To achieve this, an understanding of the test instrument design is important. Some instruments have a compensation factor to allow for power loss in standard test leads. When using long test leads, the compensation for power loss will no longer be sufficient. As a result, the test range of the instrument will be reduced.

When the resistance of the test leads is increased, the total value of R in the equation below will also increase.

$$P = I^2R$$

Where,

R = (resistance of load) + (resistance of test leads)

P = output power of the test instrument

I = output current of the test instrument

Testing wind turbine lightning protection

Since the maximum power output (P) of the test equipment cannot change, the rise in test lead resistance will cause the maximum current (I) to be reduced.

On the flip side, this principle can be used to your advantage in certain situations. If the load is inductive, it may help if more power is supplied to charge up the load. By reducing the length of the test leads, R will reduce. In this situation, it is P that will increase slightly, as there is a little more power in the instrument than is specified in the data sheet. This is intended to compensate for the losses in a few metres of test leads, but if the test leads are kept ultra short, this extra power is available for the load instead.

How can Megger help with testing wind turbines?

Megger, under its Ducter trademark, have been developing low resistance ohmmeters since 1908. Recently, we have responded to this industry need by working alongside a leading wind turbine manufacturer to develop a kit for lightning protection testing.

As a result, we now have a range of KC test leads, developed specifically for use on wind turbines. When used with our DLRO10HD low resistance ohmmeter, the KC test leads complete the ideal kit for testing wind turbine lightning protection (see figure 12).

Testing wind turbine lightning protection



Fig 12: DLRO10HD with a set of KC test leads

Benefits of the DLRO10HD and KC test leads:

- Heavy duty instrument case
- IP rating
- High power output
- Downloadable option (with DLRO10HDX)
- Up to 100 m long KC test leads

Local Sales office

Megger Limited
Archcliffe Road
Dover
Kent
CT17 9EN
ENGLAND
T. +44 (0)1 304 502101
F. +44 (0)1 304 207342

Manufacturing sites

Megger Limited
Archcliffe Road
Dover
Kent
CT17 9EN
ENGLAND
T. +44 (0)1 304 502101
F. +44 (0)1 304 207342

Megger GmbH
Obere Zeil 2 61440
Oberursel,
GERMANY
T. 06171-92987-0
F. 06171-92987-19

Megger USA - Valley Forge
Valley Forge Corporate Center
2621 Van Buren Avenue
Norristown
Pennsylvania, 19403
USA
T. 1-610 676 8500
F. 1-610-676-8610

Megger USA - Dallas
4271 Bronze Way
Dallas TX 75237-1019
USA
T 800 723 2861 (USA only)
T. +1 214 333 3201
F. +1 214 331 7399
USsales@megger.com

Megger AB
Rinkebyvägen 19, Box 724,
SE-182 17
DANDERYD
T. 08 510 195 00
E. seinfo@megger.com

This instrument is manufactured in the United Kingdom.

The company reserves the right to change the specification or design without prior notice.

Megger is a registered trademark

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc and is used under licence.

Testing wind turbine lightning protection_en_V01 06 2019