


The **THT60** model is a advanced infrared camera with capacitive touch-screen TFT color display for quick and intuitive advanced use from any kind of thermograph operator



General menu with icons

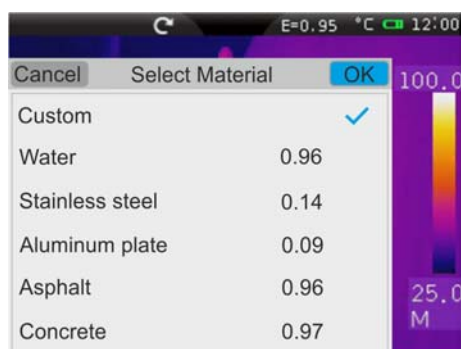

Integrated table of common emissivity values



IR video creation



Advanced analysis: Isotherm feature





1. IMAGING PERFORMANCE

Thermal	
Detector type	UFPA
Spectral range	8 ÷ 14µm
Resolution / Pxl size	384 x 288 pxl / 25µm
Thermal sensitivity	<0.06 °C @ 30°C
Field of View (FOV)	24.6° x 18.6° (22mm lens)
Minimum focal distance	0.3m
IFOV (@1m)	1.14mrad
Focusing	Manual on lens
Image frequency	50Hz
Color palettes	8 (Standard) + 10 (Customized)
Visible	
Integrated camera	CMOS sensor 640x480pxl, FOV 62.3°

2. IMAGING / IR VIDEO DISPLAY

Display type	3.5" TFT color, capacitive touch-screen, high brightness
Infra PiP Fusion	IR image inside visible & Visible image inside IR
IR Video	Recording and saving on micro SD card MPEG4 format
Video output	PAL / NTSC
Electronic zoom	x1 ÷ x20 in continuous way
Image rotation	0° ÷ 360° in step of 1°

3. MEASUREMENT

Temperature range	-20°C ÷ 400°C
Measurement unit	°C, °F, °K
Accuracy	±2%rdg or ±2°C
Measurement cursors	3 (selection temperature MIN, MAX, Customized position on image)
Laser pointer	Class 2 according with IEC 60825-1
Built-in illuminator	White light LED
Measurement modes	Automatic / Manual / Histogram
Emissivity correction	0.01 ÷ 1.00 + internal table with common materials
Measurement features	Automatic correction based on distance, relative humidity, atmospheric temperature, reflexed temperature, offset
Advanced analysis	Spots (max3), Lines (max 2), Areas (max 2), Isotherm
Alarm on temperature	Associated to measurements Spots

4. IMAGE STORAGE AND PC INTERFACE

Memory	Micro SD card 4GB
File format	JPEG standard
Memory size	> 1000 images
Voice annotation	60 s / image
Textual annotation	With internal virtual keyboard
PC interface	USB 2.0 (for video and image transfer)

5. POWER SYSTEM

Battery type	Rechargeable Li-ION, 7,4V 2700mAh
Charging system	In camera or in base charger
Battery life	4.5 hours of continuous use
External power	External adapter 100/240VAC (50/60Hz)/12VDC



THT70

Rel. 1.00 - 10/01/14

Advanced IR camera with capacitive touch-screen

Pag 3 di 3

6. GENERAL SPECIFICATIONS

Operating temperature	-20°C ÷ 50°C
Operating humidity	10% ÷ 90%HR
Storage temperature	-40°C ÷ 70°C
Storage humidity	10% ÷ 90%HR
Encapsulation	IP65 according with IEC529
Shock	25G, according with IEC60068-2-29
Vibrations	2G, according with IEC60068-2-6
Drop test	2m
Dimensions (L x W x H)	243 x 103 x 160mm
Weight(battery included)	0.92kg